



# Radiant\*Black™ Double Overhead Warmers

Models:  FDDDB  FDDL B  -18  -24  -30  -36  -42  -48  -54  -60  -66  -72

PRODUCT:

QUANTITY:

ITEM #:

## Designed Smart

- New Radiant Black™ Overhead Warmers are constructed with a flat black aluminum panel that is heated with specially designed heating elements.
- Easy to install and customize to your operation.
- Thermostatically controlled system on the side mounted versions allow operators to “dial in” the optimal heat setting for food types.
- Produces an even level of heat at a very close distance to food.



**RADIANT\*BLACK™ DOUBLE OVERHEADS**

## Built Solid

Most Durable Overhead Warmers!

- Stainless Steel Construction resists corrosion, is easy to clean, and presents an attractive appearance.
- Continuous stainless steel housing is the strongest in the industry. Units will not sag or warp.
- Supplied with angle hanging brackets for optimal spacing from the overhead area and sturdiness.
- Polished stainless steel reflector behind aluminum heat plate focuses radiant energy back toward the heat emitter. This focuses energy toward food, not out of the back of the unit.

Reliability backed by APW Wyott’s Warranty

- 1 year parts and labor warranty
- Certified by the following agencies:



## APW Wyott Design Features

- Side-Mounted Control Box (standard w/ thermostatic controls) or remote control box w/ infinite controls.
- Double Radiant\*Black overheads can be mounted as close as 8” from heat area. For units places between 8” and 14”, a remote control system is recommended.

## Options

- Chain Hanging Kits (75901) per foot
- Two Tubular Stands (76180)
- Infinite Remote Control 120V/208V/240V
- Infinite Remote Control Lights 120V
- Infinite Remote Control Lights 208/120V & 240/120V 12” box

## Consultant Specifications

The Radiant\*Black warmer shall be a Radiant\*Black™ manufactured by APW Wyott Foodservice Equipment Company, Dallas, TX 75226 U.S.A.

The food warmer shall be model..., rated at ...watts, ...volts, single phase and be ...inches (centimeters) in overall width.

The Radiant\*Black™ shall consist of a stainless steel housing, black anodized aluminum plate, polish mirror stainless steel reflectors, and require either a control box or remote infinite control enclosure.

See reverse side for product specifications.



APW Wyott Foodservice Equipment Company · 729 Third Ave., Dallas, TX 75226  
(800) 527-2100 · (214) 421-7366 · Fax (214) 565-0976 · www.apwwyott.com · info@apwwyott.com

Rev. 5/22/2005




# Radiant\*Black™ Double Overhead Warmers

Models:  Fddb  FDDLb  -18  -24  -30  -36  -42  -48  -54  -60  -66  -72

PRODUCT:

QUANTITY:

ITEM #:

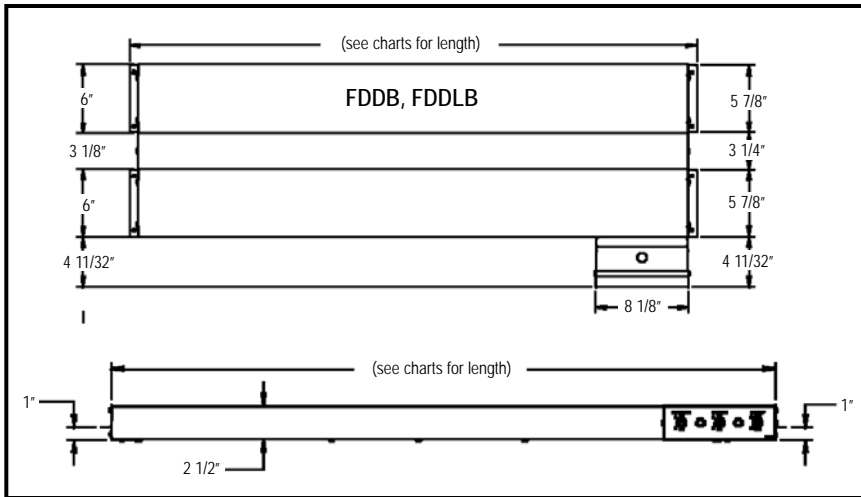

## Double Radiant\*Black Overhead Warmers

| Model   | Length | Watts | Weight |
|---------|--------|-------|--------|
| Fddb-18 | 18"    | 800   | 12 lbs |
| Fddb-24 | 24"    | 1150  | 16 lbs |
| Fddb-30 | 30"    | 1520  | 18 lbs |
| Fddb-36 | 36"    | 1840  | 21 lbs |
| Fddb-42 | 42"    | 2200  | 24 lbs |
| Fddb-48 | 48"    | 2530  | 25 lbs |
| Fddb-54 | 54"    | 2850  | 28 lbs |
| Fddb-60 | 60"    | 3220  | 30 lbs |
| Fddb-66 | 66"    | 3600  | 34 lbs |
| Fddb-72 | 72"    | 3960  | 36 lbs |

## PRODUCT SPECIFICATIONS

### Construction:

Radiant\*Black™ Overheads are supplied with Stainless Steel Housing and control box. Aluminum black anodized aluminum plate. Polished mirror stainless steel reflectors behind aluminum plate. Unit is fully insulated with one inch insulation. Hanging Angle brackets are supplied.

### Electrical Information:

Radiant\*Black™ Overheads are supplied with a rocker switch that turns the power on and, for lighted units, one that turns on the lights. Standard Double unit sizes 42" and above are only available in 208V and 240V (Lighted unit is 120/208V or 120/240V). Can be ordered with standard side mounted box or remote control box (add R to the end of model number)

### Electrical Specifications:

- Available in 120V, 208V, 240V, 208V/120V, and 240V/120V
- Models Fddb-42 through Fddb-72 available only in 208V & 240V
- Models FDDLb-42 through FDDLb-72 available only in 208V/120V or 240V/120V.
- FDDLb-66 and FDDLb-72 are supplied with 3 amp fuse, 30 amp circuit, and 12" remote (70416273)

### Overall Dimensions:

Double units: 15 1/8" W x 2 1/2" H  
 Side mounted box: 4 13/32" W x 2 1/2" H x 8 1/8" L  
 Lighted double units: 15 1/8" W x 2 1/2" H  
 Side mounted box: 4 13/32" W x 2 1/2" H x 12 1/8" L  
 (See charts for individual lengths)

### Shipping:

Freight class 92 1/2  
 FOB: Dallas, TX

## Double Lighted Radiant\*Black Overhead Warmers

| Model    | Length | Watts | Weight |
|----------|--------|-------|--------|
| FDDLb-18 | 18"    | 880   | 13 lbs |
| FDDLb-24 | 24"    | 1230  | 17 lbs |
| FDDLb-30 | 30"    | 1600  | 19 lbs |
| FDDLb-36 | 36"    | 2000  | 22 lbs |
| FDDLb-42 | 42"    | 2360  | 25 lbs |
| FDDLb-48 | 48"    | 2690  | 26 lbs |
| FDDLb-54 | 54"    | 3010  | 29 lbs |
| FDDLb-60 | 60"    | 3460  | 31 lbs |
| FDDLb-66 | 66"    | 3840  | 35 lbs |
| FDDLb-72 | 72"    | 4200  | 37 lbs |

\*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.



APW Wyott Foodservice Equipment Company · 729 Third Ave., Dallas, TX 75226  
 (800) 527-2100 · (214) 421-7366 · Fax (214) 565-0976 · www.apwwyott.com · info@apwwyott.com

Rev. 5/22/2005  
 # 1034